



GREASE TRAP DEG ...

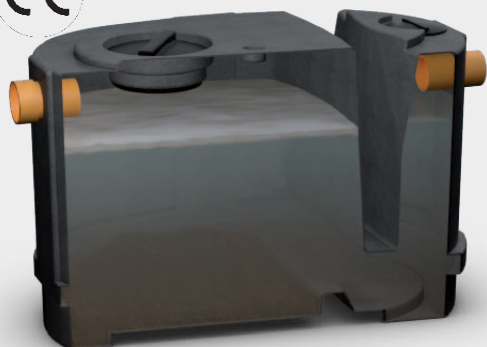

INSTALLATION

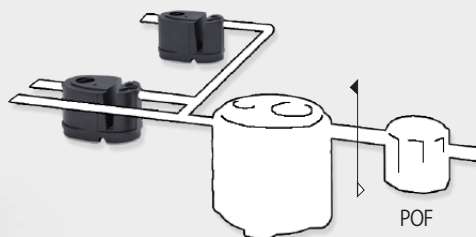

DISCHARGE



T3

NORM

UNI EN 1825/1-2

ACCESSORIES

PRO X 200/400/620
GRI Y 600
TPA Y 50
CHI Y 400-200
CHI Y 600-500

MODELS

OCTAGONAL "O"



COMPACT "K"



CORRUGATED "C"



MODULAR "M"



model *	P.E.		seats according to UNI 1825				dimensional values				
	(1)	(2)	restau- rants	refecto- ries	motorway restaurants	meat processing	NS	L x L	h	h in/out	Ø in/out
	T3	NR	CO	CO	CO	CO	l/s	cm	cm	cm	mm
DEG O 150 ..	4	3	-	70	120	20	0,5	60x60	57	49/47	80
DEG K 300 ..	10	5	-	150	250	45	1,0	95x64	62	52/50	80
DEG K 400 ..	12	7	-	190	320	55	1,3	120x80	60	48/45	125
DEG K 500 ..	14	9	-	240	400	70	1,5	120x80	70	58/55	125
DEG C 800 ..	22	16	50	280	470	80	2,0	Ø 125	105	73/70	125
DEG C 1200 ..	30	21	65	450	750	130	3,0	Ø 125	127	95/92	125
DEG C 1600 ..	42	30	90	600	1000	180	4,0	Ø 125	171	140/137	125
DEG C 2000 ..	50	36	110	750	1250	220	5,0	Ø 125	193	162/159	125
DEG C 3500 ..	-	58	175	1000	1750	300	7,0	Ø 180	149	127/124	125
DEG C 4000 ..	-	68	205	1200	2000	360	8,0	Ø 180	170	148/145	160
DEG C 4500 ..	-	77	230	1350	2250	400	9,0	Ø 180	191	169/165	160
DEG C 5000 ..	-	87	260	1500	2500	450	10,0	Ø 180	212	190/187	160
DEG N 9000 ..	-	164	-	-	-	-	18,0	210x285	234	199/194	160
DEG M 12000 ..	-	219	-	-	-	-	24,0	210x440	234	206/201	160
DEG M 15000 ..	-	273	-	-	-	-	30,0	210x465	234	199/194	160
DEG M 18000 ..	-	328	-	-	-	-	36,0	210x620	234	206/201	200
DEG M 21000 ..	-	382	-	-	-	-	42,0	210x645	234	199/194	200
DEG M 24000 ..	-	437	-	-	-	-	48,0	210x800	234	206/201	200

*complete the cod. Es: DEG C 2000 NR

(1) Norm Din 4040 - (2) Emilia Romagna, Umbria